



A Superior Alternative.

Mother Nature throws some pretty nasty weather at your home. That's why Haas Door created the 5000 Series: the strength of an insulated garage door combined with long-lasting and rust-resistant aluminum. Filled with dense CFC-free polyurethane foam insulation, 5200 models are 2" thick with a calculated R-value of 17.66, while 5700 models are 1¾" thick and have a calculated R-value of 16.88.

With four panel styles and a limited lifetime warranty, the 5000 Series is built to last while providing distinction and style. Open the door to endless possibilities with a 5000 Series door today!



open the door to
endless possibilities

5000 SERIES

- 24 Gauge Aluminum
- Full Thermal Break
- 2 Color Options
- 4 Panel Options
- Available with Wind Load

- Industry Leading Warranty
- Lifetime Free from Delamination
- 35 Year Paint Finish
- 6 Year Hardware
- 3 Year Spring

5200

- 2" Thick CFC-Free Polyurethane
- 17.66 Calculated R-Value
- Air Infiltration Seal

5700

- 1¾" Thick CFC-Free Polyurethane
- 16.88 Calculated R-Value


Features

The 5000 Series doors have an embossed stucco exterior and are offered in Trinar® Polar White and Trinar® Almond colors. 5000 Series doors feature a tough, durable and weather-resistant Trinar® paint finish. Exposed for decades at weathering facilities in South Florida and other locations around the world, testing has proven Trinar® paints are more than capable of withstanding the degrading effects of weather extremes from the equator to the arctic.

A vinyl top cap and bottom cap provide a full thermal break, separating the outside aluminum from the inside aluminum. In addition, the 5000 Series has a heavy vinyl bottom weather seal. This combination of protection seals out the elements and repels the most hostile weather conditions. The 5000 Series is also available in a wide range of design pressures for wind load requirements.



AVAILABLE COLORS

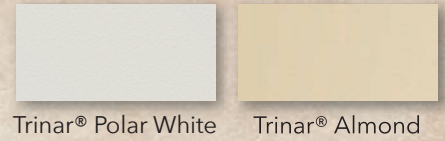

PANEL OPTIONS



Flush Stucco



V-Groove Stucco



Raised Ranch Stucco Panel



Raised Standard Stucco Panel

5200 SERIES

- 5210 | 5212 | 5270 | 5280
- 2" Thick CFC-Free Polyurethane
- 17.66 Calculated R-Value
- Air Infiltration Seal

5700 SERIES

- 5710 | 5712 | 5770 | 5780
- 1¾" Thick CFC-Free Polyurethane
- 16.88 Calculated R-Value

ACCESSORIES



Hinges



Handles



Black nylon, white nylon,
10 ball steel roller



Powder Coated Hardware Options



open the door to
endless possibilities

